



## Yamaha Field-Corps 8200 Series Bass Drum Drum Slip™ Installation Instructions


The instructions in this document apply to the following current model Yamaha Field-Corps 8200 Series marching bass drums:

- 14"x14" (ON2 Percussion Drum Slip ID: YBFC014)
- 16"x14" (ON2 Percussion Drum Slip ID: YBFC016)
- 18"x14" (ON2 Percussion Drum Slip ID: YBFC018)
- 20"x14" (ON2 Percussion Drum Slip ID: YBFC020)
- 22"x14" (ON2 Percussion Drum Slip ID: YBFC022)
- 24"x14" (ON2 Percussion Drum Slip ID: YBFC024)
- 26"x14" (ON2 Percussion Drum Slip ID: YBFC026)
- 28"x14" (ON2 Percussion Drum Slip ID: YBFC028)
- 30"x16" (ON2 Percussion Drum Slip ID: YBFC030)
- 32"x16" (ON2 Percussion Drum Slip ID: YBFC032)

It is highly recommended that you read through this entire document ***BEFORE*** attempting to install Drum Slips™.

Copyright © 2013 ON2 Percussion®  
DRUM SLIPS ARE PATENT PENDING  
Drum Slips™ is a registered trademark of ON2 Percussion®  
ON2 Percussion® is not affiliated with the Yamaha Corporation  
www.on2percussion.com


## Step One: Preparing Your Drum for Drum Slips™

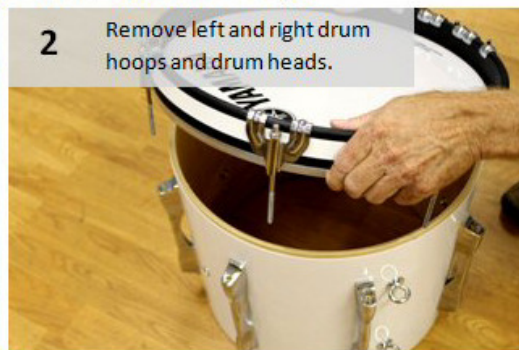


Continue to the installation process.

## Step Two: Installing Drum Slips™

**3** Open and unroll Drum Slips.

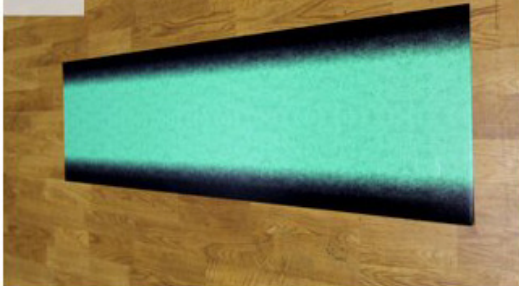

**4** Lay the Drum Slip on top of the drum.

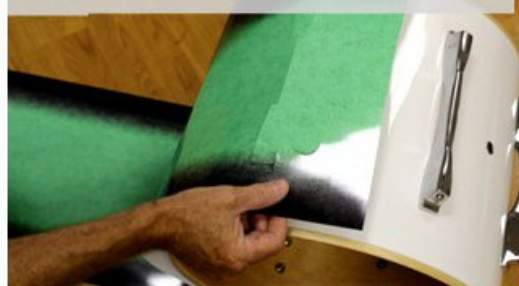


**5** Begin pressing down on the Drum Slip on corresponding hardware perforations for a quick installation. Start at carrier eye hooks.



**6** Continue this process around the entire drum. Slide wings under lug casing arch.



**7** Peel away tape strip backing. Carefully pull and stick the two ends of the Drum Slip together very tightly. *Do not stretch slip.*

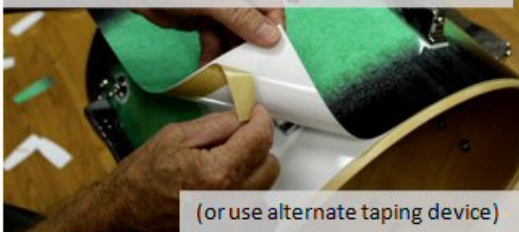


(or use alternate taping device)

**8** If the Drum Slip warps when pinched, it will **NOT** install correctly.



**9** The Drum Slip should not warp when pinched; it should fit flush to shell with little or no play.

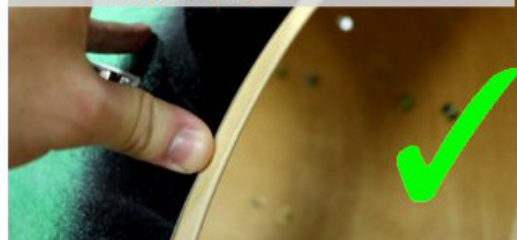

Continue to Installation Finalization



## Step Three: Finalizing the installation of Drum Slips™

- 10** Drum Slips are forgiving, slide the Drum Slip around until the hardware is centered.



- 11** Reinstall both drum hoops and heads.



- 12** Apply necessary tension to both drum heads.



Finished

## Installation Complete

